Conventional Indoor Sounder 8204C

The conventional indoor sounder 8204C is applicable for sound and LED indication of events registered in Fire Alarm Systems.

8204C is compliant with EN54-3.

Technical data

Supply voltage:
– (15-30) VDC

Current consumption in fire mode:
– 9 mA on 24 VDC

Sound level, type “Slow whoop” on 1m: 90dB (A)
Frequency, pattern “Slow whoop”: 0.5 – 1,2 kHz

Operation temperature:
-10 °C to +55 °C
Dimensions: Ø100, h 47 mm
Weight (base included): 0.075 kg
Protection: IP 40
Construction: ABS
Mounting: Using bases of series 8000S

Bases

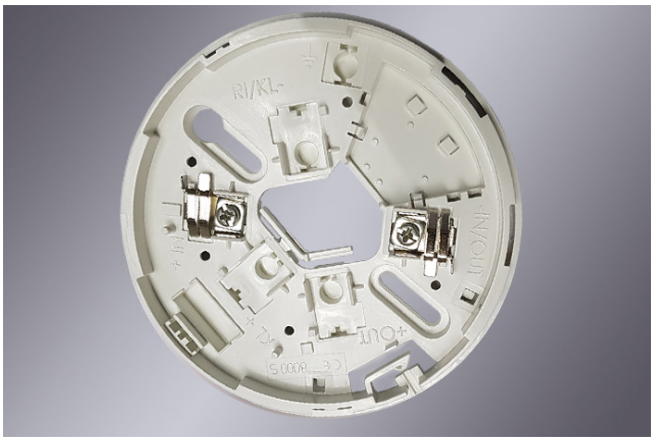

Base DB 8000S

DB 8000S is a common base, applicable for the standard fire alarm installations. It is used with the conventional indoor sounder 8204C.

Office building UniPOS,
1 Efr. Nikola Paskalev Str., Mladost 1, Sofia 1748, Bulgaria
Phone: +359 2 97 439 25, +359 2 97 444 69

47 San Stefano Str., Pleven 5800, Bulgaria
Phone: +359 64 891 100

www.unipos-bg.com

UniPOS Ltd. reserves the right to alter the specifications of its products without notice. Although every effort has been made to ensure the accuracy of the information contained in this document it is not warranted or represented by UniPOS Ltd. to be a complete and up-to-date description. No liability is accepted for any consequence of the use of this document.