

# VTO3221E-P

## Villa Outdoor Station



### Technical Specification

Model	VTO3221E-P
-------	------------

#### System

Main Processor	Embedded Micro Processor
----------------	--------------------------

Operation System	Embedded LINUX OS
------------------	-------------------

#### Video

Video Compression	H.264
-------------------	-------

Image Sensor	1/2.9" 2MP CMOS
--------------	-----------------

Auto Gain Control	White Light
-------------------	-------------

Lens	2mm
------	-----

Angle of View	H:138°,V:78°,D:158°
---------------	---------------------

Day/Night	Color Image
-----------	-------------

#### Audio

Audio Compression	G.711
-------------------	-------

Audio Input	Omnidirectional Mic
-------------	---------------------

Audio Output	Built-in Speaker
--------------	------------------

Bidirectional Talk	Support Dual-way Bidirectional talk
--------------------	-------------------------------------

#### Display

Screen	2.3" OLED
--------	-----------

#### Operation Mode

Keypad	Mechanical Button with Braille
--------	--------------------------------

Reader	Mifare Card (13.56MHz)
--------	------------------------

### Features

- Keyboard villa door station
- Supplemental lighting with white light
- 2MP CMOS camera
- Mechanical button with Braille
- Aluminium alloy plate, IK08, IP65 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)
- Door release via password and Mifare card

### Interface

Alarm In/Out	1/1
Door Control	1 Relay Out 1 RS485 1 Feedback 1 Exit Button
Wiegand In	1

### Network


Ethernet	10M/100Mbps
----------	-------------

Network Protocol	TCP/IP
------------------	--------


### General

Ingress Protection	IK08, IP65 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)
Tamper Switch	1
Installation	Surface & Flush
Material	Aluminum
Power	DC 12V, 2A, PoE(802.3af)
Power Consumption	Standby ≤2W, Work ≤7W
Working Temperature	-40°C~+60°C
Relative Humidity	20%~95%RH
Dimensions	200mm×98mm×32mm
Weight	1.5Kg

Dimensions

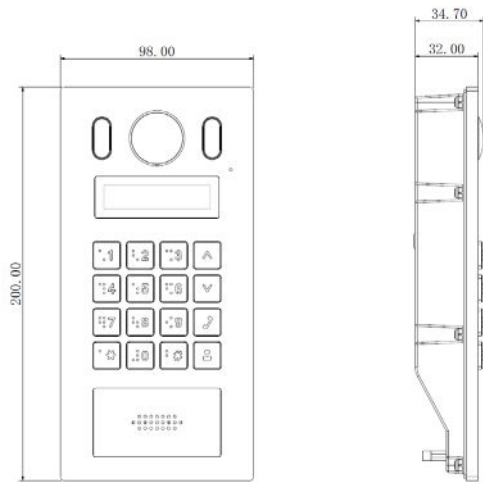

View Area

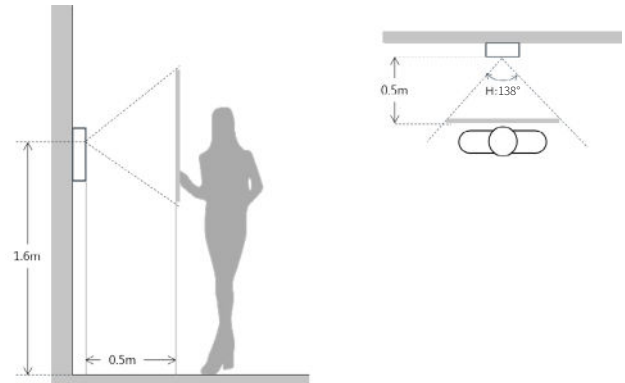

Application

